

Straight Male Stud Couplings


GE-ME

Dimensions in mm

DIN Fittings

Metric Tube end as per ISO 8434

Male Metric (M) Thread as per
DIN 3852 Part 11,
ISO 9974 Form E
with Elastomeric seal

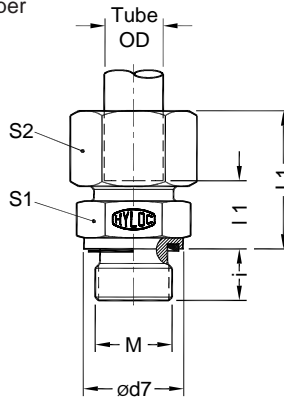

Part No.	Series	Tube od	M Male Metric thread	ø d7	i	l1	* L1	S1	S2
GE06PLME	Light L 250 bar	6	M10 x 1.0	14	8	8.5	24	14	14
GE08PLME		8	M12 x 1.5	17	12	10	25	17	17
GE10PLME		10	M14 x 1.5	19	12	11	26.5	19	19
GE12PLME		12	M16 x 1.5	22	12	12.5	27.5	22	22
GE15PLME		15	M18 x 1.5	24	12	13.5	29.5	24	27
GE18PLME	160 bar	18	M22 x 1.5	27	14	14.5	31.5	27	32
GE22PLME		22	M26 x 1.5	32	16	16.5	33.5	32	36
GE28PLME	100 bar	28	M33 x 2.0	40	18	17.5	35.5	41	41
GE35PLME		35	M42 x 2.0	50	20	17.5	40.5	50	50
GE42PLME		42	M48 x 2.0	55	22	19	42.5	55	60
GE06PSME	Heavy S 630 bar	6	M12 x 1.5	17	12	13	28.5	17	17
GE08PSME		8	M14 x 1.5	19	12	15	30	19	19
GE10PSME		10	M16 x 1.5	22	12	15	32	22	22
GE12PSME		12	M18 x 1.5	24	12	17	33.5	24	24
GE16PSME	400 bar	16	M22 x 1.5	27	14	18.5	37.5	27	30
GE20PSME		20	M27 x 2.0	32	16	20.5	43	32	36
GE25PSME		25	M33 x 2.0	40	18	23	48	41	46
GE30PSME	250 bar	30	M42 x 2.0	50	20	23.5	51.5	50	50
GE38PSME		38	M48 x 2.0	55	22	26	57.5	55	60

* Dimensions given are approx figures with tightened nut.