

PH783 - CONVOLUTED PTFE HOSE WITH HELIX WIRE AND POLYPROPYLENE YARN STANDARD WALL

Polyhose Proprietary Product


Construction

Core Helically convoluted sintered tube of polytetrafluoroethylene (P.T.F.E)
External AISI 304 Wire Support

Reinforcement Single braid of polypropylene yarn

Application High temperature lines where vibrations and frequent handling are involved

Note: Available in medium wall version and our part # shall be PH793. Available with PVDF yarn braid and our part # shall be PH784 and available in medium wall version and our part # shall be PH794

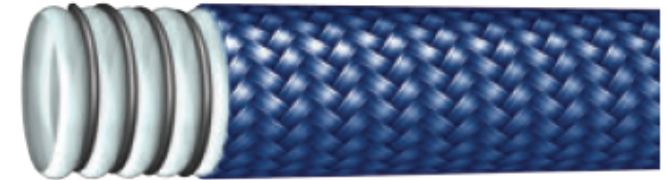

Item Code	Dash Size	WT	ID		OD		WP		V	BP		BR/r		W
			inch	mm	inch	mm	psi	bar		mbar	psi	bar	inch	
PH783-08	-8	0.75	1/2	12.70	0.866	22.0	290	20	899	1,160	80	1.3	32	361
PH783-10	-10	0.80	5/8	15.88	1.063	27.0	218	15	899	870	60	1.6	40	426
PH783-12	-12	0.90	3/4	19.05	1.252	31.8	218	15	899	870	60	2.0	50	548
PH783-16	-16	1.00	1	25.40	1.472	37.4	218	15	899	870	60	2.4	60	599
PH783-20	-20	1.00	1.1/4	31.75	1.776	45.1	145	10	899	580	40	3.1	80	830
PH783-24	-24	1.00	1.1/2	38.10	1.988	50.5	145	10	899	580	40	3.9	100	1162
PH783-32	-32	1.10	2	50.80	2.500	63.5	145	10	899	580	40	4.9	125	1433



Temperature Range: Continuous: -54°C to +180°C

Intermittent: max. +160°C