


PH908 - 8 SPIRALS OF HIGH TENSILE STEEL WIRE

Polyhose Proprietary Product

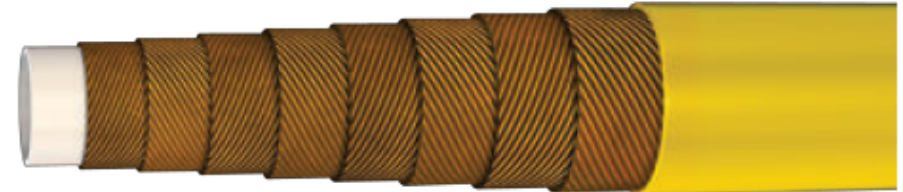

Construction

- Core** Polyoxymethylene (POM)
- Reinforcement** 8 Spirals of high tensile steel wire
- Cover** Polyamide (PA) - Yellow
- Application**

Water blast: Heat exchanger tube cleaning, surface preparation (Concrete removal, surface cleaning of buildings, paint removal), tank and vessel cleaning, ultra high - pressure waterjet cutting and hydro demolition (cutting and demolition of armoured concrete, pipelines, paper or steel)

Hydraulics: Pressure test equipment (valves, tooling and control panels), hydraulic tools (instrumentation packages for gauges, control of service equipment, hydraulic jacks, hydraulic tools), hydroforming

Oil and Gas: Gaseous media handling

Item Code	DN	ID		OD	WP		BP		BR/r	W
		inch	mm	mm	psi	bar	psi	bar	mm	g/m
PH908-025	4	5/32	4.0	12.8	46,400	3,200	116,000	8,000	175	540
PH908-03	5	3/16	4.5	15.3	46,400	3,200	116,000	8,000	250	700
PH908-04	6	1/4	5.8	18.6	46,400	3,200	116,000	8,000	280	1100
PH908-05	8	5/16	7.6	22.0	46,400	3,200	107,300	7,400	300	1500
PH908-08	12	1/2	12.8	27.7	40,600	2,800	87,000	6,000	350	2100
PH908-10	16	5/8	15.9	31.8	29,000	2,000	72,500	5,000	400	2600



Temperature Range: Continuous: -30°C to +60°C