



RADIAL PISTON DOUBLE PUMPS

Model : 2RC****

Ref. No. D 09046
Release 07 / 2019

ENGINEERING - 1 of 4

A Polyhydron Group Company

Description

Model **2RC****** are rugged Radial Piston Double Pumps with 3, 5 or 7 pumping elements in each section of the pump. These pumps are valve controlled and there is no restriction on direction of rotation of the pump.

These pumps can be submerged in oil or externally mounted above oil level.


Pumps with model code **2RCE***** have extension shaft for through drive and are available with extension bracket assembly for coupling a pump having standard flange as per ISO 3019/1.

They are available with 21 flow combination and 7 pressure ratings.


These pumps give fixed output per revolution of the shaft.



Section




Model : 2RC***

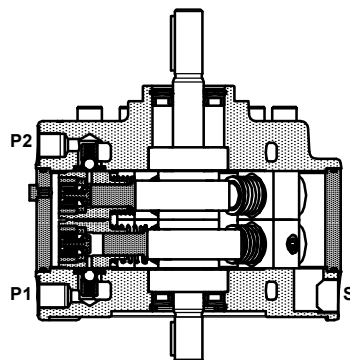


Model : 2RCE***

Hydraulic symbol

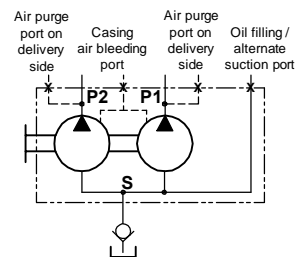

Model : 2RC***



Model : 2RCE***

Technical specifications

Designation	:	2RC is a basic Radial piston double pump with casing. 2RCE is a Radial piston double pump with casing and extension shaft.
Design	:	Radial piston, valve controlled.
No. of elements	:	3, 5 or 7 ,each at P1 and P2 port depending upon flow requirement.
Mounting	:	Face mounting with Air purge port at highest level.
Interface	:	Factory standard.
Direction of rotation	:	2RC - No restriction on direction of rotation. 2RCE - Depends upon the direction rotation of pump attached.
Connection	:	Suction port - G1/2 female. Delivery (port P1 and P2) - G3/8 female.
Speed range	:	300 to 2000 r/min.
Max. Suction Head	:	At no time allow the oil level in the tank to fall 500 mm below the axis of the pump, when the pump is mounted horizontally, or 500 mm below the mounting face of the pump, when the pump is mounted vertically.
Flow and Pressure	:	Refer Table no. 1
Torque limitations	:	Input drive shaft - 75 Nm Extension shaft - 53 Nm
Hydraulic medium	:	Mineral oil.
Temperature range	:	-20°C to + 80°C.
Viscosity range	:	10 cSt to 100 cSt.
Fluid cleanliness required	:	ISO 4406 20/18/15 or better.
Mass	:	Model : 2RC3 2RCE3 2RC5 2RCE5 2RC7 2RCE7 Kg : 12.6 12.8 16.0 16.1 17.2 17.4

polyhydron pvt. ltd.

78-80, Machhe Industrial Estate,
Machhe, Belgaum - 590 014. INDIA.

Phone : +91-(0)831- 2411001
Fax : +91-(0)831- 2411002
E-mail : polyhydron@gmail.com
Website : www.polyhydron.com







Unit dimensions

Dimensions in mm.

Pump without extension shaft



Model - 2RC3

M8 x 12 deep,
4 nos on 80 P.C.D.
Tightening torque 39 Nm.

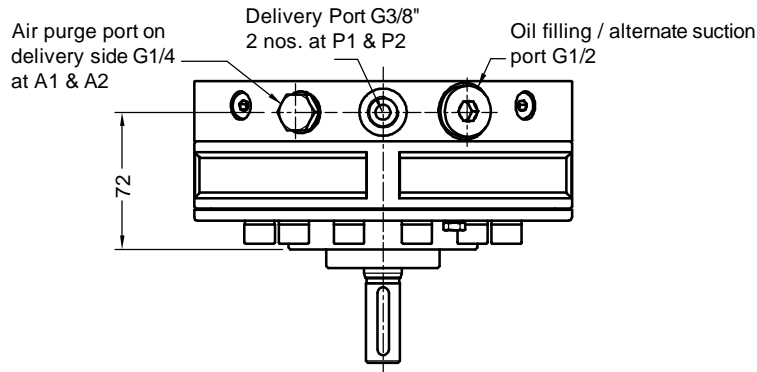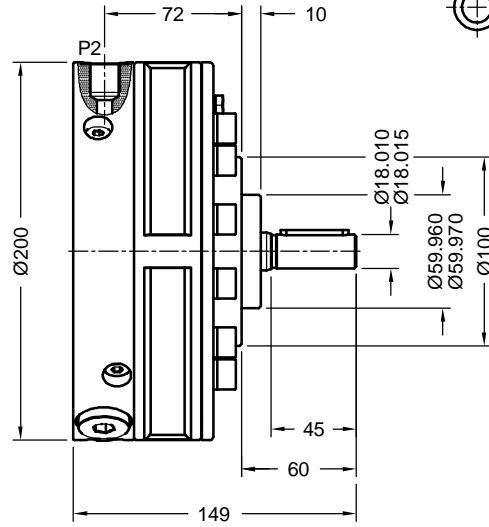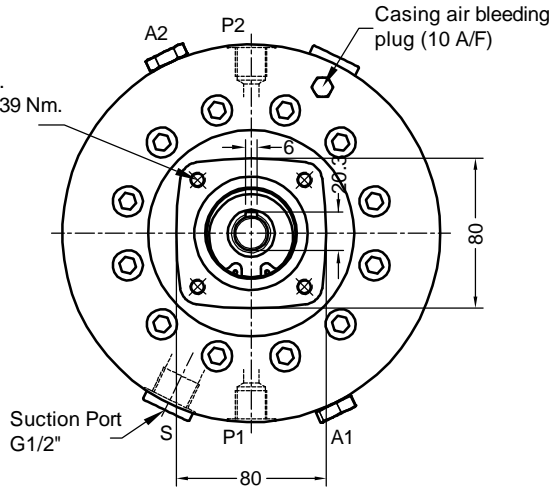


Pump with extension shaft


Model - 2RCE3

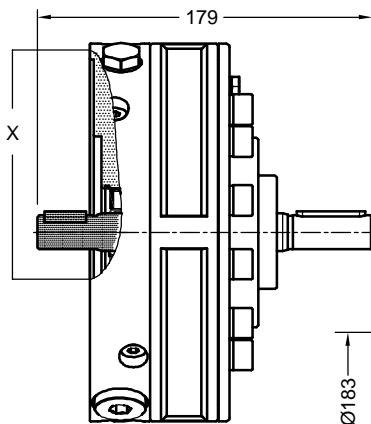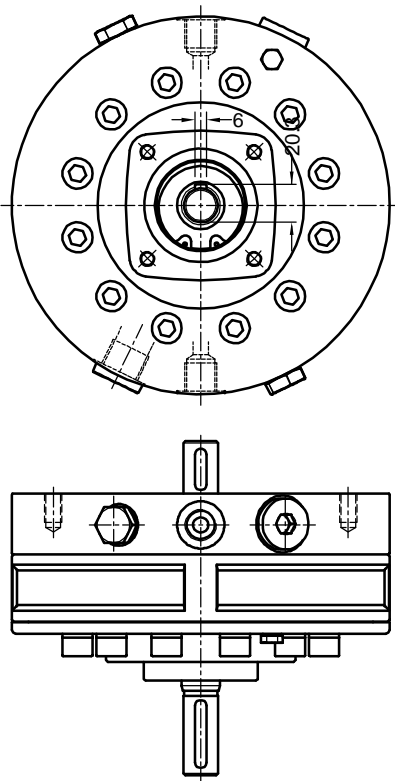

Detail at 'X'



Extension bracket mounting
M10 x 17 deep, 2 nos.
Tightening torque 77 Nm.


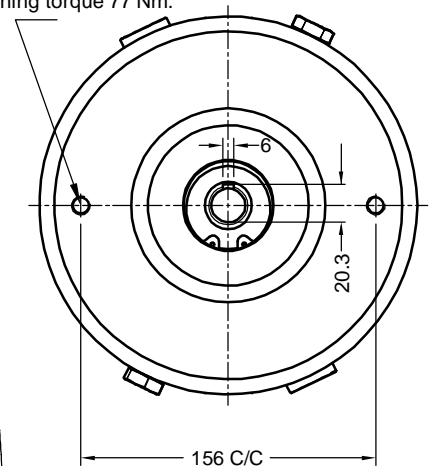




Unit dimensions


Pump without extension shaft

Model - 2RC5 OR 2RC7

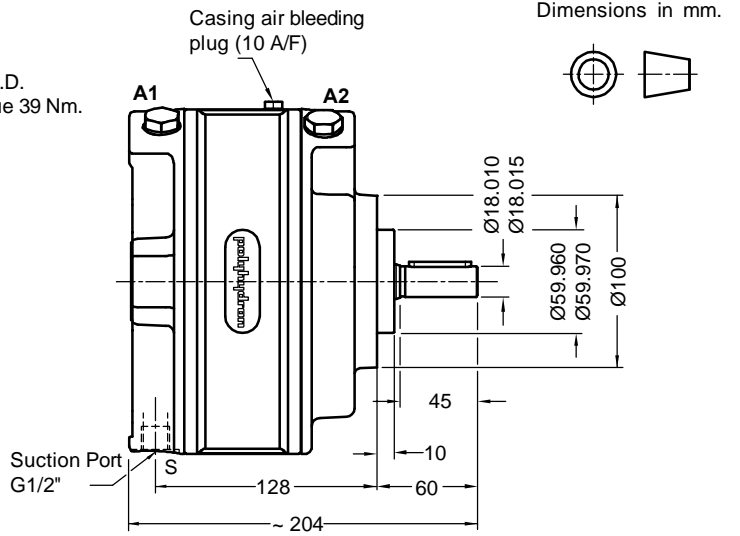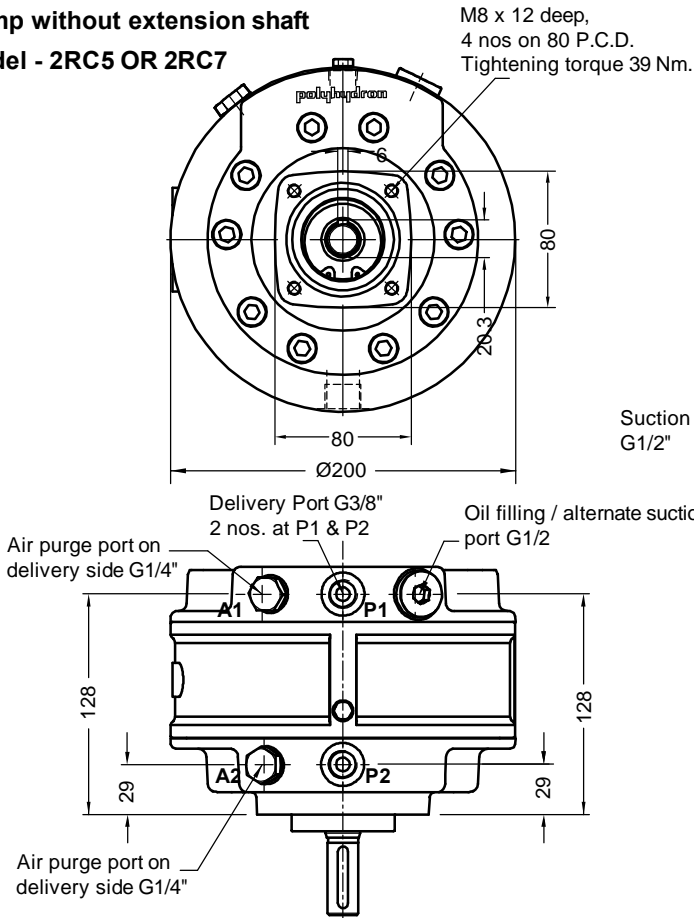

Pump with extension shaft

Model - 2RCE5 OR 2RCE7

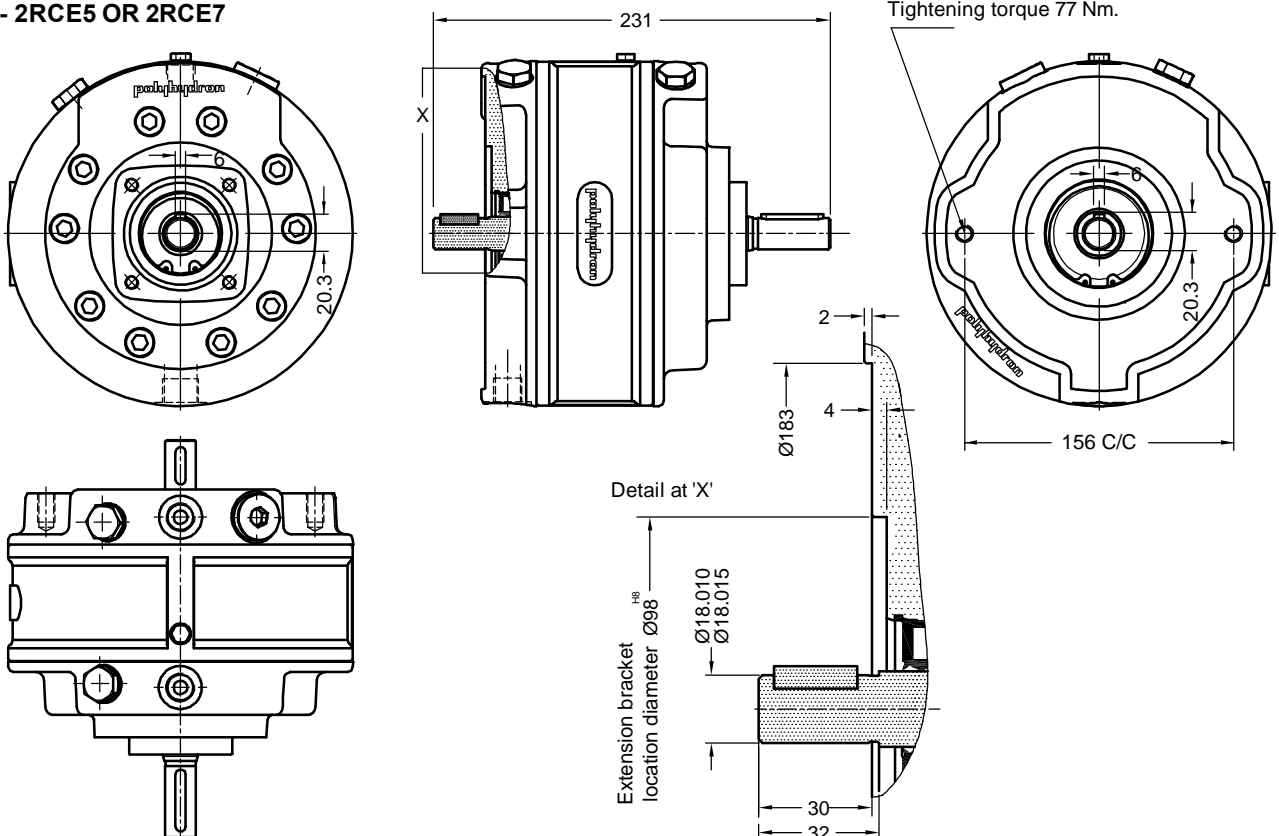




Performance Table no. 1

No. of pumping elements per section	Element type	Geometrical displacement in cm ³ /r	Pump output in l/min At 1450 r/min	Maximum Operating pressure in bar	Pressure in bar													
					50	100	150	200	250	300	350	400	450	500	550	600	650	700
					Power required per section to drive the pump in kW													
3	Z	0.69	0.9	700	0.10	0.19	0.29	0.39	0.48	0.58	0.68	0.77	0.87	0.96	1.06	1.16	1.25	1.35
5		1.15	1.5		0.16	0.32	0.48	0.64	0.80	0.96	1.13	1.29	1.45	1.61	1.77	1.93	2.09	2.25
7		1.61	2.2		0.23	0.45	0.68	0.90	1.13	1.35	1.58	1.80	2.03	2.25	2.48	2.70	2.93	3.15
3	A	1.20	1.6	550	0.17	0.34	0.51	0.69	0.86	1.03	1.20	1.37	1.54	1.71	1.89			
5		2.00	2.7		0.29	0.57	0.86	1.14	1.43	1.71	2.00	2.29	2.57	2.86	3.14			
7		2.80	3.8		0.40	0.80	1.20	1.60	2.00	2.40	2.80	3.20	3.60	4.00	4.40			
3	B	1.89	2.6	450	0.27	0.54	0.80	1.07	1.34	1.61	1.88	2.14	2.41					
5		3.15	4.3		0.45	0.89	1.34	1.79	2.23	2.68	3.13	3.57	4.02					
7		4.41	6.0		0.63	1.25	1.88	2.50	3.13	3.75	4.38	5.00	5.63					
3	C	2.70	3.7	350	0.39	0.77	1.16	1.54	1.93	2.32	2.70							
5		4.50	6.2		0.64	1.29	1.93	2.57	3.22	3.86	4.50							
7		6.30	8.6		0.90	1.80	2.70	3.60	4.50	5.40	6.30							
3	D	3.18	4.3	300	0.45	0.91	1.36	1.81	2.26	2.72								
5		5.30	7.2		0.75	1.51	2.26	3.02	3.77	4.53								
7		7.42	10.1		1.06	2.11	3.17	4.23	5.28	6.34								
3	E	3.69	5.0	250	0.53	1.05	1.58	2.10	2.63									
5		6.15	8.4		0.88	1.75	2.63	3.50	4.38									
7		8.61	11.7		1.23	2.45	3.68	4.90	6.13									
3	F	4.23	5.8	200	0.60	1.21	1.81	2.41										
5		7.05	9.6		1.00	2.01	3.01	4.02										
7		9.87	13.5		1.41	2.81	4.22	5.63										

1kW = 1.34 hp

Ordering code

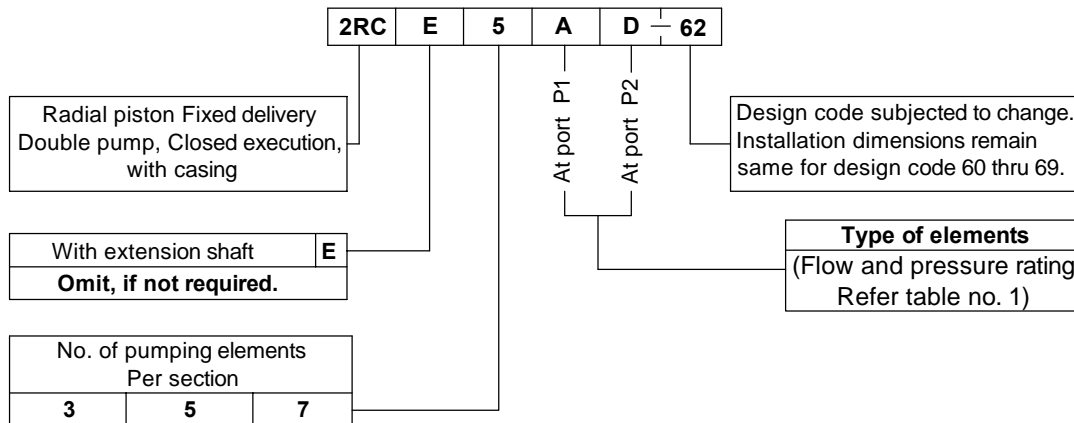

Note : For Bell housing refer Data sheet no. D 09035 and For extension bracket refer Data sheet no. D 09090.
For commissioning of pump refer datasheet no. D 11200 P.

All rights reserved.
Subject to change without notice.
Due to continuous improvements in the design of the product, the actual product supplied may look different than shown above, but will have same routing dimensions.
For critical applications, please ask for certified installation drawing.