

PH304 - SEWER JET - 4000 PSI

Polyhose Proprietary Product


Construction

Core Thermoplastic Elastomer

Reinforcement One or more Braids of Aramid Fiber and one braid of synthetic fiber

Cover Polyurethane, Green Colour

Application Particularly suitable for use with compact vehicles and lateral sewer line cleaning equipment. High pressure capability combined with high safety factor, flexibility and small profile. Abrasion and cut resistant cover designed for long life. Ideal for use in small pipes and ducts. Bonded construction to resist kinking. Available in long lengths

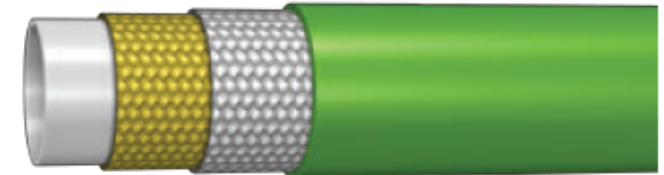

Note: Special colours available on request

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH304-04	-04	06	1/4	6.4	0.510	13.0	5,000	345	20,000	1,380	1.6	40	129.0
PH304-06	-06	10	3/8	9.5	0.640	16.2	4,000	280	16,240	1,120	2.4	60	158.0
PH304-08	-08	12	1/2	12.7	0.805	20.4	4,000	280	16,240	1,120	4.0	100	256.0
PH304-10	-10	16	5/8	16.0	0.970	24.6	4,000	280	16,240	1,120	4.5	115	356.0
PH304-12	-12	20	3/4	19.0	1.150	29.2	4,000	280	12,000	840	5.0	125	514.0
PH304-16	-16	25	1	25.4	1.450	36.8	4,000	280	10,000	690	6.3	160	734.0
PH304-20	-20	32	1.1/4	31.8	1.800	45.7	3,600	250	9,000	625	10.0	250	1136.0



Temperature Range: Continuous: -40°C to +60°C