

Directional spool valves,
direct operated,
with hydraulic actuation

Type LS 1378

RE 24783

Edition: 2016-10



- ▶ Size 32
- ▶ Component series 1X
- ▶ Maximum operating pressure 210 bar
- ▶ Maximum flow 500 l/min

Features

- ▶ 6/2 directional design
- ▶ For subplate mounting
- ▶ Spool position monitoring

Contents

Features	1
Ordering code	2
Symbols	2
Function, section	3
Technical data	4
Characteristic curves	5
Dimensions	6
Inductive proximity sensors	7 ... 10
Further information	11

Ordering code

01	02	03	04	05	06
LS 1378	X201	-	1X	/	QSABG24W
				/	*

01	Directional spool valve, direct operated, hydraulically actuated	LS 1378
02	Symbol see below	X201
03	Component series 10 ... 19 (10 ... 19: unchanged installation and connection dimensions)	1X


Spool position monitoring

04	- Inductive proximity sensor type QS	
	Monitored spool position "a" and "b"	QSABG24W
	For further details, refer to page 7 and 8, as well as data sheet 24830	

Seal material

05	NBR seals	no code
	FKM seals	V
	Observe compatibility of seals with hydraulic fluid used. (Other seals upon request)	
06	Further details in the plain text	*

Symbols



Function, section

Valve type LS 1378 is a directional spool valve with hydraulic actuation. It controls the start, stop and direction of a flow.

The directional valve basically consists of main valve with housing (1), the main control spool (2) and the compression spring (3).

The spring chamber (6) is internally connected to port P. The control chamber (5) is externally supplied with pilot oil via channel X and supplies the control chamber (5) of the control spool (4).


The main control spool (2) is held in spool position "b" by the pressurization of the two front faces with identical pilot pressure.

In this spool position, the control spool (4) rests on the housing and fixes the position of the main control spool (2). Pressure relief of the control spool (4) area brings the main control spool (2) into spool position "a".

The unloaded control spool (4) area displaces the returning pilot oil via channel X into the tank.

Notes:

With this valve, the compression spring (3) does not have a reset function. In depressurized condition and with horizontal installation, it holds the main control spool (2) in the basic position.

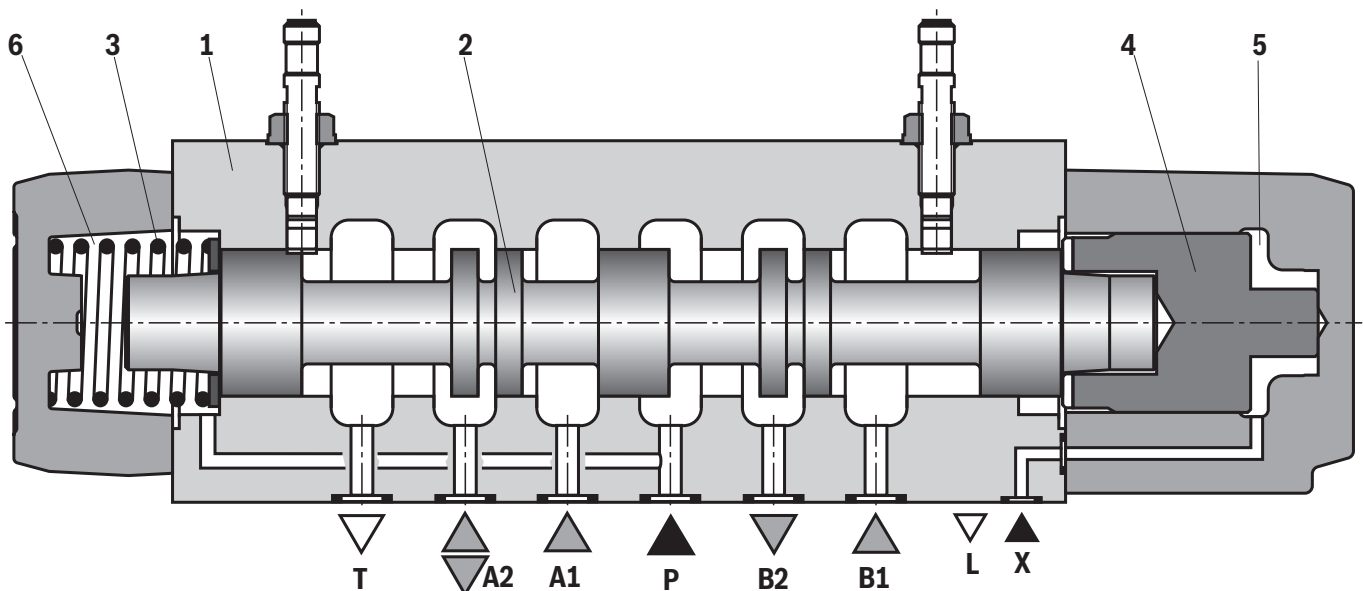

Technical data

(For application outside these values, please consult us!)

general		
Weight	kg	30
Installation position		Horizontal
Ambient temperature range	°C	-30 ... +50
Storage temperature range	°C	-20 ... +70
Surface protection (valve body)		Painting
MTTF _d value according to EN ISO 13849	Years	150 (for further details see data sheet 08012)

hydraulic		
Maximum operating pressure	bar	210
Maximum pilot pressure	bar	210
Minimum pilot pressure	bar	50
Maximum flow	l/min	500
Hydraulic fluid		See table below
Hydraulic fluid temperature range (at the valve working ports)	°C	-30 ... +70
Viscosity range	mm ² /s	2.8 ... 380
Maximum admissible degree of contamination of the hydraulic fluid Cleanliness class according to ISO 4406 (c)		Class 20/18/15 ¹⁾

Hydraulic fluid	Classification	Suitable sealing materials	Standards	Data sheet
Mineral oils	HL, HLP, HLPD, HVLP, HVLPD	NBR, FKM	DIN 51524	90220
Bio-degradable	▶ Insoluble in water	HETG	ISO 15380	90221
		HEES		
	▶ Soluble in water	HEPG	ISO 15380	
Flame-resistant	▶ Water-free	HFDR, HFDR	ISO 12922	90222
	▶ Containing water	HFC (Fuchs Hydrotherm 46M, Petrofer Ultra Safe 620)	NBR	ISO 12922

**Important information on hydraulic fluids:**

- ▶ For more information and data on the use of other hydraulic fluids, please refer to the data sheets above or contact us.
- ▶ There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.).

▶ Flame-resistant – containing water:

- Maximum pressure differential per control edge 50 bar
- Pressure pre-loading at the tank port >20% of the pressure differential, otherwise increased cavitation erosion
- Life cycle as compared to operation with mineral oil HL, HLP 30 ... 100%
- Maximum hydraulic fluid temperature 60 °C


electric			
Switching time according to ISO 6403 ²⁾	- ON	s	1.0
	- OFF	s	1.3

¹⁾ The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and at the same time increases the life cycle of the components.

For the selection of the filters, see www.boschrexroth.com/filter.


²⁾ The switching times were determined at a hydraulic fluid temperature of 40 °C and a viscosity of 46 cSt. Deviating hydraulic fluid temperatures can result in different switching times. Switching times change dependent on operating time and application conditions.

When establishing the electrical connection, the protective earthing conductor (PE \perp) must be connected correctly.

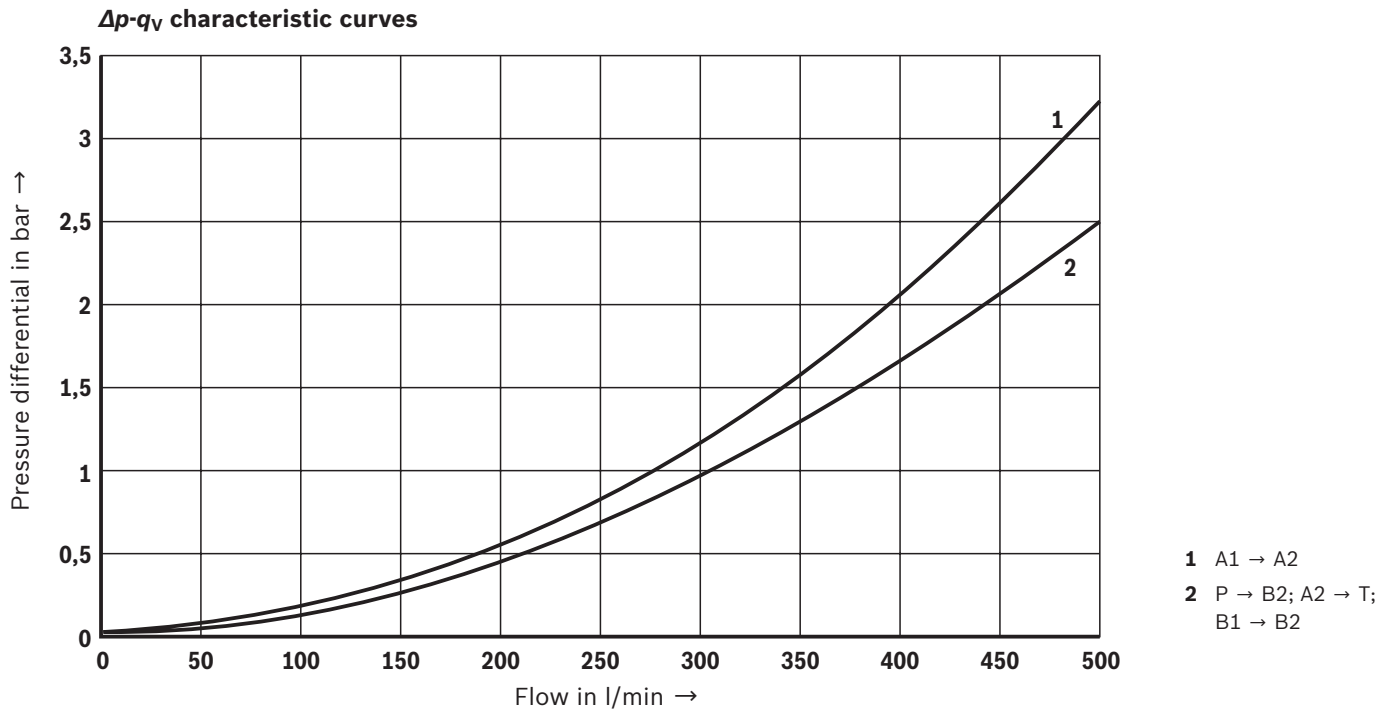Characteristic curves(measured with HLP46, $\vartheta_{\text{Oil}} = 40 \pm 5 \text{ }^\circ\text{C}$)

Dimensions

(dimensions in mm)

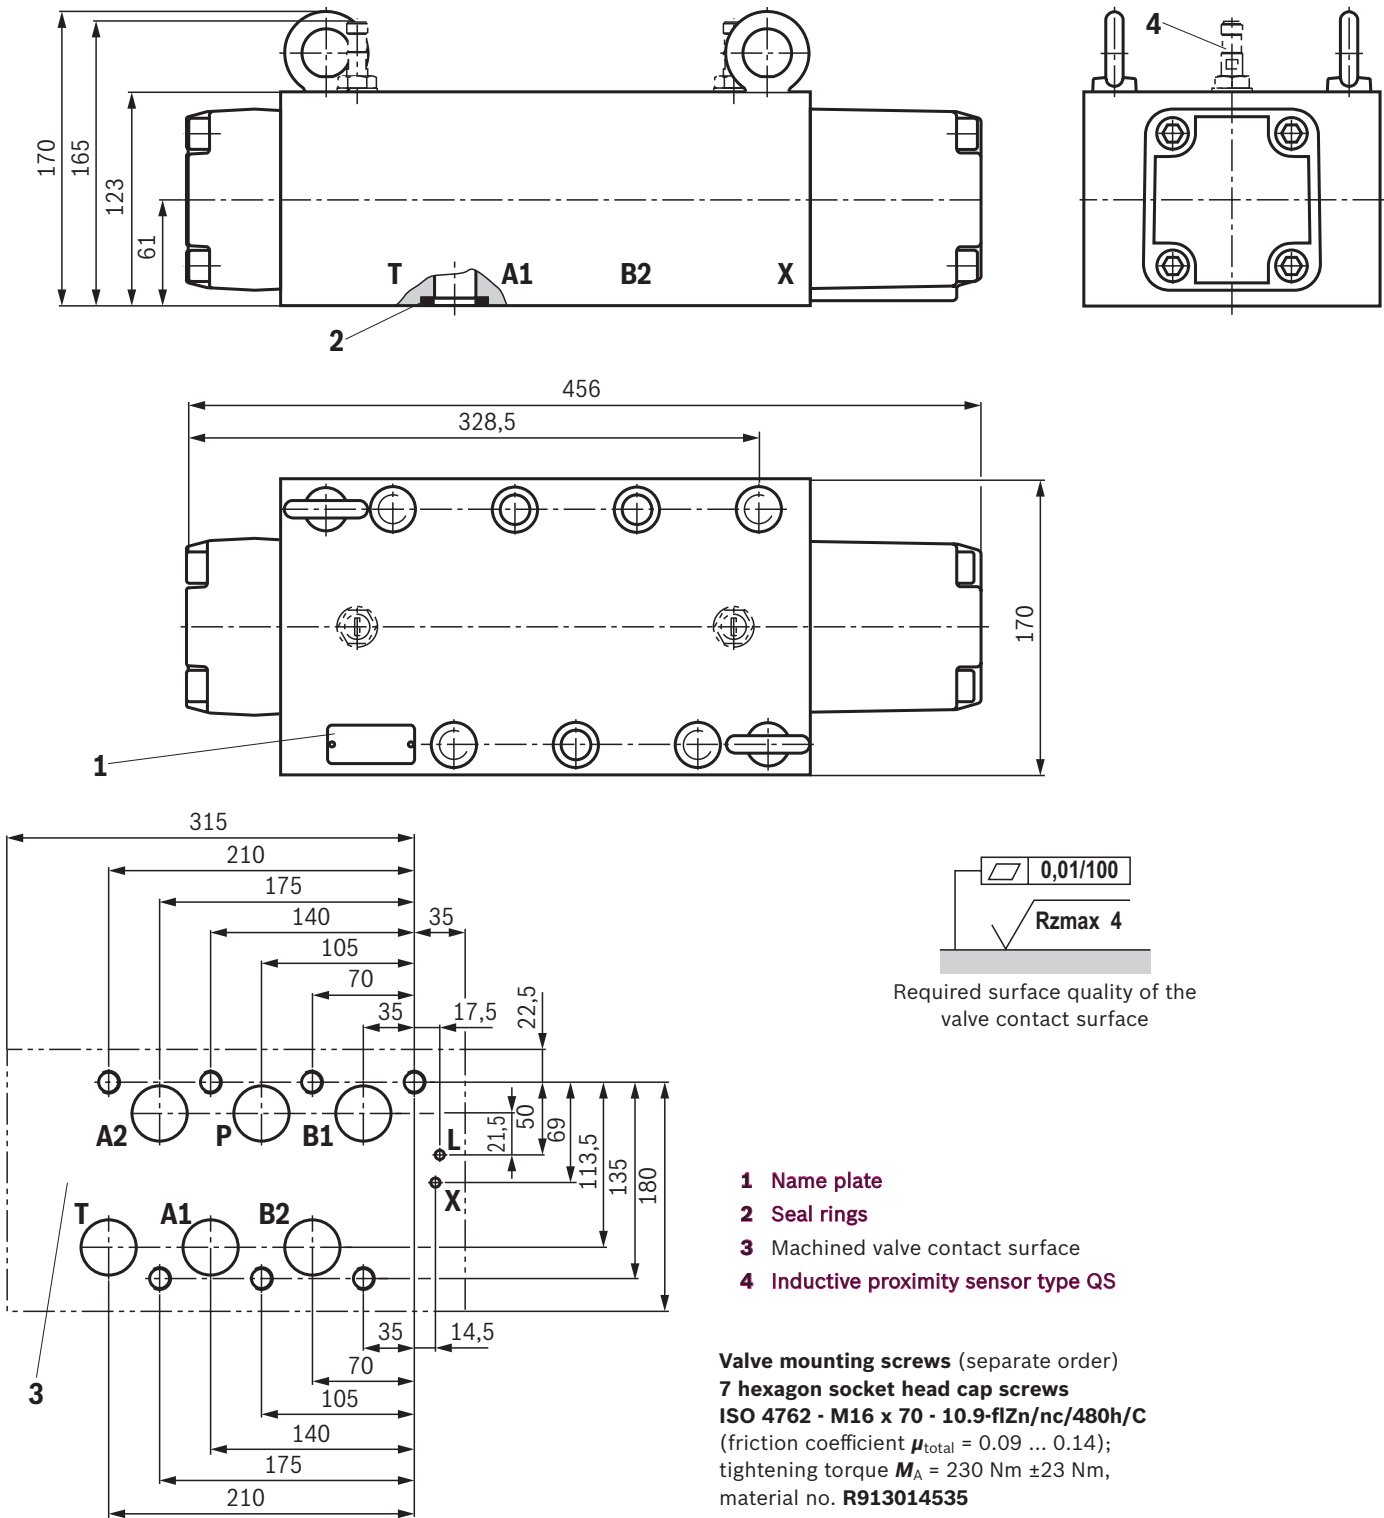

Notice:

The dimensions are nominal dimensions which are subject to tolerances.

Inductive proximity sensors

With on/off valves, contactless proximity sensors with integrated switching amplifiers are switched after reaching of the spool position to be monitored. The spool position reached is displayed by a binary signal.

Advantages of the proximity sensors:

- ▶ Short-circuit-proof
- ▶ Available with M12 x 1 plug-in connections
- ▶ Direct monitoring of the spool position at the control spool
- ▶ Long life cycle
- ▶ High reliability due to no use of dynamic seals
- ▶ Reaction time of the switch upon operation approx. 15 ms.

Notes:

Valves with proximity sensors in safety-relevant controls may only be assembled and commissioned by hydraulically and electrically trained specialists.

Adjustment and maintenance work requires special tools and devices. This work may only be performed by authorized specialists or in the factory!


Improper work at safety equipment leads to a risk of personal injury and damage to property!


- ▶ The essential valve components are coordinated with each other in the production plant and adjusted during assembly. They must not be interchanged. In case of valve or position switch defects, the complete valve must be exchanged!
- ▶ The factory setting of the proximity sensor must not be changed. The proximity sensor may only be set by the valve manufacturer.
- ▶ The proximity sensor must be automatically monitored by the machine control to prevent initiation of a new machine cycle even in case of a failure of the proximity sensor.
- ▶ The machine control and the selected components are to be designed so that the leakage cannot lead to an inadmissible closing movement.
- ▶ The switching times according to ISO 6403 specified in the respective valve data sheets do **not** correspond to the reaction times of the proximity sensor (time between signal change at the solenoid and the signal change of the proximity sensor). Temporal query mechanisms should be set at least to 80 ... 100 ms.

Inductive proximity sensor type QS: Electrical connection

The electrical connection is realized via a 4-pole mating connector (separate order, see page 9) with connection thread M12 x 1.


Connection voltage:	24 V ±25 %, direct voltage
Admissible residual ripple:	≤ 15%
Load capacity:	maximum 200 mA
Switching outputs:	PNP transistor outputs, load between switching outputs and GND

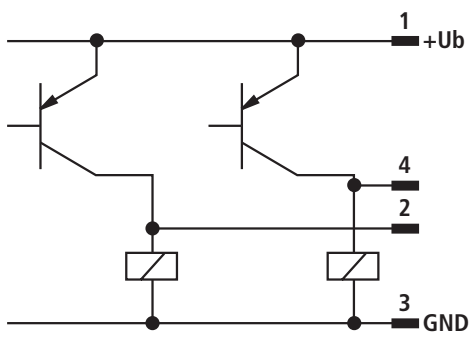

Pinout:	1 +24 V
	2 Switching output: 200 mA
	3 0 V, GND
	4 Switching output: 200 mA

Inductive proximity sensor type QS: Switching logics


Depending on the spool position to be monitored, the switching outputs have the following function:

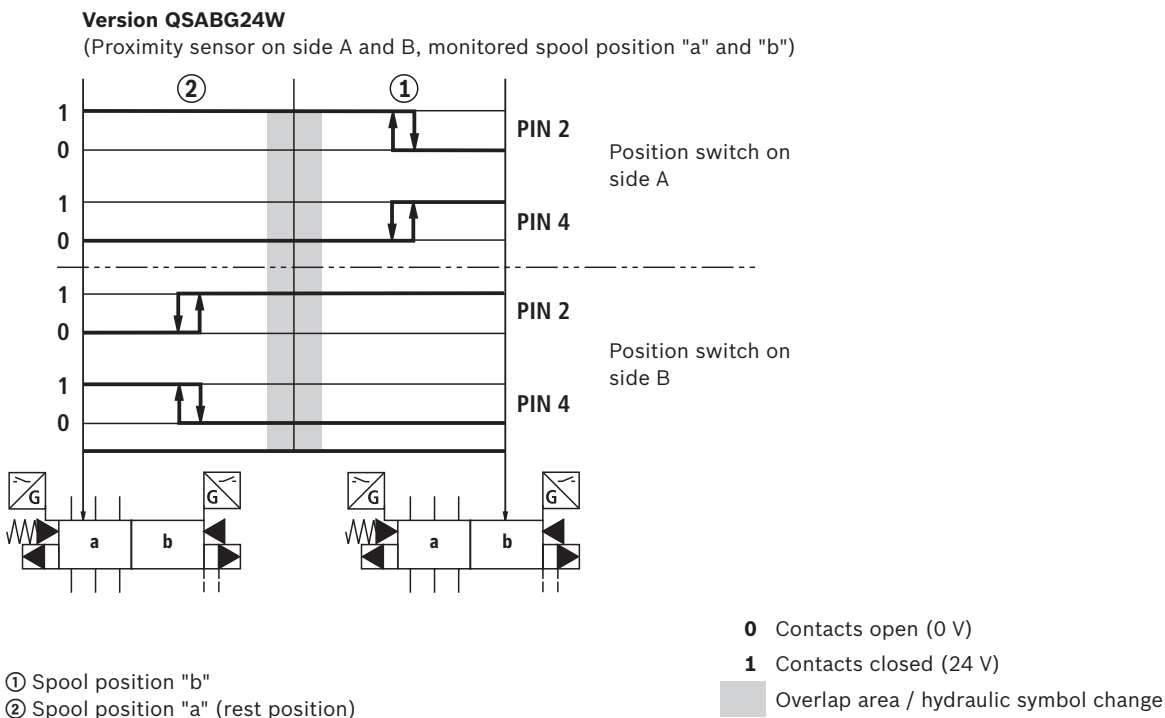

Mating connectors (dimensions in mm)


Mating connector suitable for K24 4-pole, M12 x 1 with screw connection, cable gland Pg 9.

Material no. **R900031155**

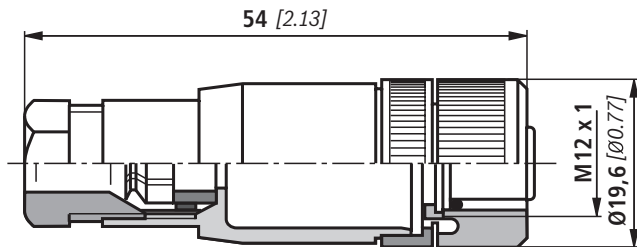

Mating connector suitable for K24 4-pole, M12 x 1 with screw connection, cable gland Pg 9, angled. Housing rotatable by 4 x 90° in relation to the contact insert.

Material no. **R900082899**

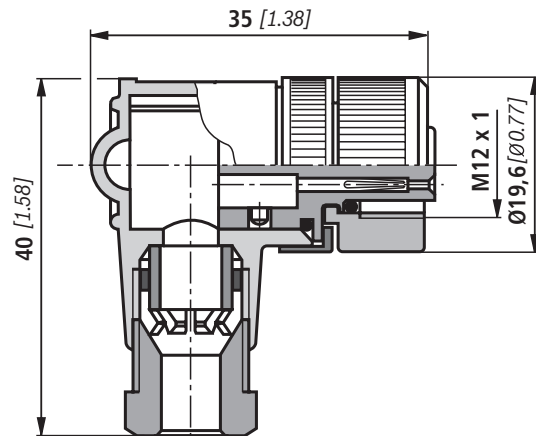


Mating connector suitable for K24-3m 4-pole, M12 x 1 with potted-in PVC cable, 3 m long.

Line cross-section: 4 x 0.34 mm²

Core marking:

1	brown
2	white
3	blue
4	black

Material no. **R900064381**

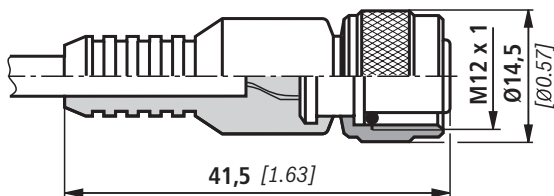

For further information refer to data sheet 08006.

Bosch Rexroth AG
Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Phone +49 (0) 93 52/18-0
documentation@boschrexroth.de
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Further information

- ▶ Inductive position switch and proximity sensors (contactless) Data sheet 24830
- ▶ Hydraulic fluids on mineral oil basis Data sheet 90220
- ▶ Environmentally compatible hydraulic fluids Data sheet 90221
- ▶ Flame-resistant, water-free hydraulic fluids Data sheet 90222
- ▶ Flame-resistant hydraulic fluids - containing water (HFAE, HFAS, HFB, HFC) Data sheet 90223
- ▶ Reliability characteristics according to EN ISO 13849 Data sheet 08012
- ▶ Mating connectors and cable sets for valves and sensors Data sheet 08006
- ▶ Hydraulic valves for industrial applications Operating instructions
07600-B

- ▶ Selection of the filters www.boschrexroth.com/filter
- ▶ Information on available spare parts www.boschrexroth.com/spc

Bosch Rexroth AG
Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Phone +49 (0) 93 52/18-0
documentation@boschrexroth.de
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.
The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Notes

Bosch Rexroth AG
Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Phone +49 (0) 93 52/18-0
documentation@boschrexroth.de
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.
The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Notes

Bosch Rexroth AG
Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Phone +49 (0) 93 52/18-0
documentation@boschrexroth.de
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.
The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.