


PH721 / PH722 - FLUOROPOLYMER - LOW PRESSURE CONDUCTIVE / NON - CONDUCTIVE

Polyhose Proprietary Product

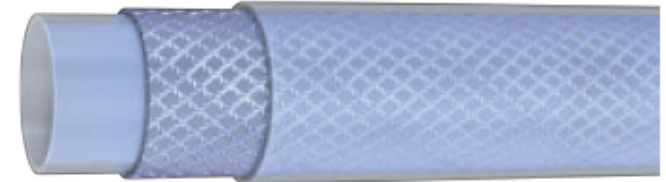

Construction

Core FEP (Fluorinated ethylene propylene)

Reinforcement Single braid of synthetic fiber

Cover Polyurethane, Transparent

Application Conventional paint Spraying, Low pressure paint circulation and supply, Low pressure electrostatic lacquer system, Low pressure chemical product supply systems

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH721 / PH722-04	-04	06	1/4	6.4	0.472	12.0	290	20	1,160	80	3.5	90	117
PH721 / PH722-06	-06	10	3/8	9.5	0.600	15.2	220	15	880	60	5.1	130	175
PH721 / PH722-08	-08	12	1/2	12.7	0.827	21.0	145	10	580	40	7.1	180	275



Temperature Range: Continuous: -40°C to +95°C

Temp. not to exceed +70°C for Air and Water based fluids