


PH 621 - CEMENT / PLASTER PLACEMENT HOSE

Polyhose Proprietary Product

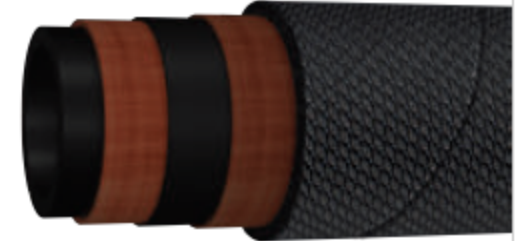

Construction

- Core** Black colour, Synthetic and natural rubber blend resistant to abrasion
- Reinforcement** High Tensile Synthetic Textile cord
- Cover** Black colour, Synthetic rubber resistant to ozone, weather and abrasion
- Application** For Cement/ Plaster/ Sand placement in construction industry

Item Code	Dash Size	ID		OD		WP		BP		W
		inch	mm	inch	mm	psi	bar	psi	bar	kg/m
PH621-16	-16	1	25.0	1.46	37.0	150	10	435	30	0.70
PH621-20	-20	1.1/4	32.0	1.81	46.0	150	10	435	30	0.99
PH621-24	-24	1.1/2	38.0	2.05	52.0	150	10	435	30	1.42
PH621-32	-32	2	51.0	2.56	65.0	150	10	435	30	2.04
PH621-40	-40	2.1/2	64.0	3.15	80.0	150	10	435	30	2.65
PH621-48	-48	3	76.0	3.62	92.0	150	10	435	30	3.11
PH621-64	-64	4	102.0	4.65	118.0	150	10	435	30	4.57
PH621-80	-80	5	127.0	5.79	147.0	150	10	435	30	6.29
PH621-96	-96	6	152.0	6.93	176.0	150	10	435	30	9.40
PH621-128	-128	8	203.0	9.09	231.0	150	10	435	30	14.40



Temperature Range: Continuous: -30°C to +70°C