


PH352 - VERY HIGH PRESSURE JACK HOSE - NON CONDUCTIVE

Polyhose Proprietary Product

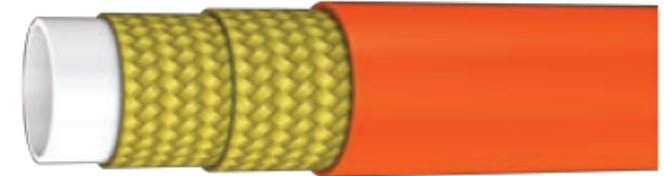

Construction

Core Thermoplastic Elastomer

Reinforcement Two or more braids of aramid fiber

Cover Polyurethane, Orange Colour

Application Non conductive Hydraulic Lines 700 bar, Compact, high pressure, light weight, high abrasion resistance and low change in length for use with petroleum, synthetic or water based fluids in Hydraulic systems. Mainly used for rescue, safety equipments, bolt tensioning tools and jacking & re-railing equipments. Mainly used in applications requiring High electrical insulation or non-conductivity

Note: Available Twin & Multi lines with different Hose combination and size

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH352-02	-02	02	1/8	3.2	0.358	9.1	10,000	700	40,000	2,800	1.0	25	76
PH352-40	-	-	5/32	4.0	0.375	9.6	10,000	700	40,000	2,800	1.1	27	80
PH352-04	-04	06	1/4	6.4	0.590	15.0	10,000	700	40,000	2,800	1.4	35	195
PH352-06	-06	10	3/8	9.5	0.735	18.7	10,000	700	40,000	2,800	2.2	55	275
PH352-08	-08	12	1/2	12.7	0.920	23.4	8,000	550	32,000	2,200	4.3	110	310



Temperature Range: Continuous: -40°C to +100°C Temp. not to exceed +70°C for Air and Water based fluids