

PH362- WELDING HOSE

Applicable Standard: Polyhose proprietary product exceeds IS 447 1987 - Type 2


Construction

Core Plasticized PVC, Black

Reinforcement Single braid of Synthetic fiber

Cover Hyper Flame Retardant Thermo-compound, Red / Blue Colour

Application Specially designed for Oxy-acetylene welding and cutting equipments

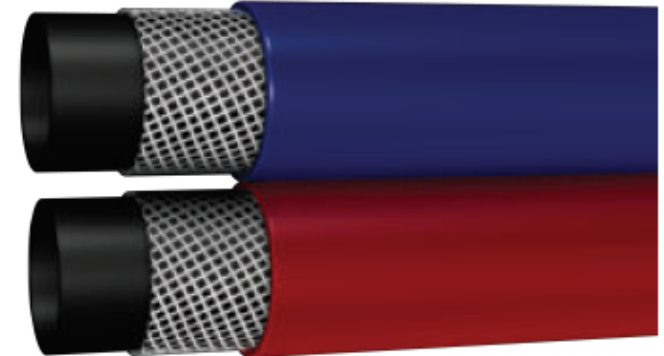

Note : Special colours available on request

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH362-03	-03	05	3/16	4.8	0.413	10.5	220	15	800	55	0.9	23	105.0
PH362-04	-04	06	1/4	6.5	0.492	12.5	220	15	800	55	1.0	25	125.0
PH362-05	-05	08	5/16	8.0	0.571	14.5	220	15	800	55	1.1	28	155.0
PH362-06	-06	10	3/8	9.5	0.630	16.0	220	15	800	55	1.5	38	180.0
PH362-08	-08	12	1/2	12.7	0.827	21.0	220	15	800	55	2.0	50	250.0



Temperature Range: Continuous: -10°C to +60°C