


PH902Q / PH902QL / PH902QZ- 4 SPIRALS OF HIGH TENSILE STEEL WIRE, 2 DENSE AND 2 OPEN LAYERS

Polyhose Proprietary Product

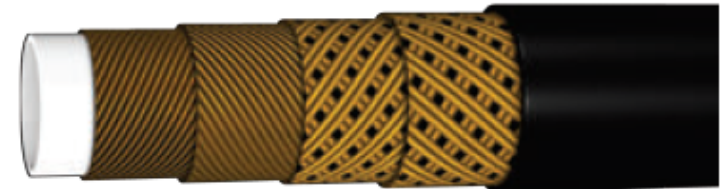

Construction

Core Polyamide (PA)

Reinforcement 4 Spirals of high-tensile steel wire, 2 dense and 2 open layers

Cover Polyurethane (PUR) -for PH902Q & PH902QL- Black Colour and for PH902QZ - Silver colour

Application Water Blast: Heat exchanger tube cleaning

Hydraulics: Pressure test equipment (valves, tooling and control panels), hydraulic tools (instrumentation packages for gauges, control of service equipment, hydraulic jacks, hydraulic tools)

Oil and Gas: Grease injection, control of subsea hydraulic components

Item Code	DN	ID		OD	WP		BP		BR/r	W
		inch	mm	mm	psi	bar	psi	bar	mm	g/m
PH902Q-025	4	5/32	4.0	9.8	20,300	1,400	50,750	3,500	65	160
PH902Q-04	6	1/4	6.0	12.0	18,560	1,280	46,400	3,200	95	230
PH902Q-05	8	5/16	8.0	14.3	15,080	1,040	37,700	2,600	110	314
PH902Q-06	10	3/8	10.0	17.2	15,950	1,100	40,020	2,760	125	430
PH902Q-08	12	1/2	12.8	20.8	15,080	1,040	37,700	2,600	150	590
PH902Q-12	20	3/4	18.8	29.5	11,020	760	27,550	1,900	220	1160
PH902Q-16	25	1	25.0	35.6	9,280	640	23,200	1,600	280	1490
PH902QL-04	6	1/4	5.9	12.0	17,400	1200	43,500	3,000	80	240
PH902QZ-05	8	5/16	8.0	16.0	15,080	1040	37,700	2,600	110	400
PH902QZ-08	12	1/2	12.8	22.2	15,080	1040	37,700	2,600	150	600



Temperature Range: Continuous: -30°C to +60°C