


PH302 - SEWER JET - 3000 PSI

Polyhose Proprietary Product

Construction

- Core Thermoplastic Elastomer
- Reinforcement One or more Braids of Synthetic Fiber
- Cover Polyurethane, Blue Colour

Application Standard Sewer cleaning vehicles and cleaning equipments. Heavy duty construction for optimum cut and wear resistance with bonded tube and cover. Available in long lengths with a special cover, resistant to microbiological degradation light weight compared to conventional rubber alternatives and increased lifetime

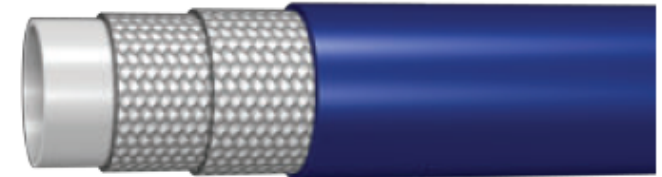

Note: Special colours available on request

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH302-02	-02	03	1/8	3.2	0.335	8.5	3,000	210	7,500	525	1.2	30	57.0
PH302-03	-03	05	3/16	4.8	0.413	10.5	3,000	210	7,500	525	1.4	35	83.0
PH302-04	-04	06	1/4	6.4	0.505	12.8	3,000	210	7,500	525	1.6	40	117.0
PH302-06	-06	10	3/8	9.5	0.640	16.3	3,000	210	7,500	525	3.0	75	170.0
PH302-08	-08	12	1/2	12.7	0.880	22.4	3,000	210	7,500	525	4.0	100	318.0
PH302-10	-10	16	5/8	16.0	1.030	26.2	3,000	210	7,500	525	4.3	110	430.0
PH302-12	-12	20	3/4	19.0	1.150	29.2	3,000	210	7,500	525	4.9	125	496.0
PH302-16	-16	25	1	25.4	1.470	37.3	3,000	210	7,500	525	6.3	160	759.0
PH302-20	-20	32	1.1/4	31.8	1.830	46.5	3,000	210	7,500	525	9.8	250	1159.0



Temperature Range: Continuous: -40°C to +60°C