


# PH301 - SEWER JET - 2500 PSI

Polyhose Proprietary Product

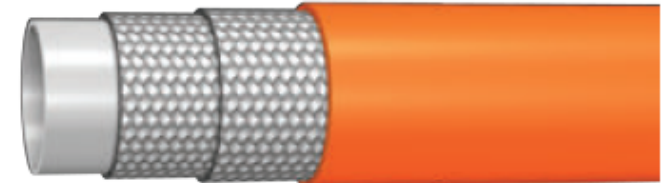

## Construction

**Core** Thermoplastic Elastomer

**Reinforcement** One or more Braids of Synthetic Fiber

**Cover** Polyurethane, Orange Colour

**Application** Standard Sewer cleaning vehicles and cleaning equipments. Special construction for optimum cut and wear resistance with bonded tube and cover. Available in long lengths with a special cover resistant to microbiological degradation light weight compared to conventional rubber alternatives and increased lifetime

Note: Special colours available on request

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH301-03	-03	05	3/16	4.8	0.413	10.5	2,500	175	6,250	438	1.6	40	83.0
PH301-04	-04	06	1/4	6.4	0.505	12.8	2,500	175	6,250	438	1.6	40	118.0
PH301-06	-06	10	3/8	9.5	0.640	16.3	2,500	175	6,250	438	2.4	60	167.0
PH301-08	-08	12	1/2	12.7	0.810	20.6	2,500	175	6,250	438	4.0	100	248.0
PH301-10	-10	16	5/8	16.0	1.030	26.2	2,500	175	6,250	438	4.3	110	417.0
PH301-12	-12	20	3/4	19.0	1.150	29.2	2,500	175	6,250	438	5.0	125	496.0
PH301-16	-16	25	1	25.4	1.450	36.8	2,500	175	6,250	438	6.3	160	714.0
PH301-20	-20	32	1.1/4	31.8	1.800	45.7	2,500	175	6,250	438	10.0	250	1106.0



Temperature Range: Continuous: -40°C to +60°C